

# FC-1000 L/S<sub>TYPE</sub>

## FC-1000



### Standard devices

- Heater temperature monitor
- Film end stop device
- Abnormal air pressure stop device
- Total counter
- Preset counter
- Pattern matching device
- Film joint detector
- Detective removal device
- Edge slit removing device
- Horizontal sealing position changing device of dial type (used for matching the pattern)

Sanko's Automatic stick-type packaging machine is Best Seller in the world.

基本特許： US (U.S.A) 5822949 DE (Germany) 19710241 IT (Italy) 1289247 ES (Spain) 2152127  
 GB (England) 2311759 FR (France) 9705545 CH (China) ZL97111535.4 TW (Taiwan) 095194 KR (Korea) 222607

### ■ Packaging style

When the film width is 450 mm, the effective width is 420 mm, because about 30 mm in total is slit at both sides.


- a. Fin seal: A maximum of 8 lines of same bags shown on the right can be produced.  
 $420 \div 48 = 8.75$  (Round down the decimals.)
- b. Lap seal: A maximum of 9 lines of same bags shown on the right can be produced.  
 $420 \div 44 = 9.545$  (Round down the decimals.)

NOTE: Details of the calculation will be discussed with you and determined when determining the specifications.


### ■ Packaging dimensions

Exmp. Maximum number of lines of Fine Seal

stick-type package



Development of stick-type package

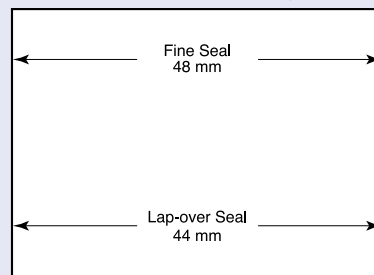

### ● Specifications

Model	FC-1000 L type	FC-1000 S type
Dimensions	1,930 wide × 2,005 deep × 2,500 high mm	1,730 wide × 2,005 deep × 2,300 high mm
Air consumption	0.6 MPa, 650 NL/min	0.6 MPa, 650 NL/min
Weight	Approx. 2,200 kg	Approx. 2,000 kg
Power consumption	6 kW at peak, 3 kW on the average	
Dimensions of bag	50 to 190 long, 10 to 60 wide, mm (specified dimensions)	50 to 120 long, 10 to 60 wide, mm (specified dimensions)
Film width	620 mm max	
Packaging speed	20 to 100 bags/min. per line When 10 lines, 200 to 1,000 bags/min.	

\*Packaging speed varies depending on the material to be sealed in and the packaging film.